

## HL-CK70A 7寸有线真彩触摸屏



HL-CK70A

### 性能特点:

- 安装尺寸: 215 × 129 × 35 (含面板);  
开口尺寸: 202 × 106 × 52;
- 铝拉丝面板, 高雅而又尊贵;
- 自定16组定时器, 用户可在屏上校正时间, 更改定时时间;
- 触发定时器的时候自动弹出提示;
- 7寸TFT 6,5000色真彩色工业级屏幕, 800x480高分辨率;
- 支持双向通信;
- 单个操作可触发多条指令, 支持双向通信;
- 采用ARM处理芯片, 支持多任务进程, 功能强大;
- 操作界面可编辑, 图形界面支持图片、图形文字、3D按键;
- USB下载工程;
- 提供开放式界面编辑平台;
- 采用HL-Net总线通信;

### 性能描述:

7寸65K真彩屏单控开关、窗帘和场景总线控制, 可自定义界面支持3D文字、3D图片个性化界面; 用于集中控制在客厅或床头, 支持双向通信;

### Performance Description

The product has 7 inch real color screen. It can achieve single switch control, curtain and scene bus control. User can customize the graphic interface, which supports 3D text and 3D photo. The panel supports bi-directional communication and central control;

### Performance Characteristics

- Installation dimension: 215 × 129 × 35 (including panel),  
Hole dimension: 202 × 106 × 52;
- Aluminum wire panel, elegant and noble;
- The touch panel can customize 16 groups of timer. User can correct the time and change the timer on the screen;
- Can automatically pop-up tips when triggering the timer;
- 7 inch TFT 6,5000 real color industrial grade screen, 800X480 high resolution;
- Provides bi-directional communication;
- A single operation can trigger multiple instructions;
- It has ARM processing chip, supports multi task process. And it is powerful;
- Operation interface can be edited. Graphic interface supports picture, graphic, text and 3D buttons;
- Download project by USB interface;
- Provides opening interface editing platform;
- Communicated by HL-Net Bus;

### 技术参数:


- 供电电源: DC12-24V 600mA;
- 触屏尺寸: 7寸;
- 屏幕彩色: 65536级;
- 屏幕分辨率: 800 × 480;
- 外框颜色: 银白;
- 触屏方式: 电阻式;
- 通信接口: 1 × RS485/rs232/HL-Net3位凤凰端子;
- 工程下载: USB接口 T型头;
- 运行温度/湿度: 0°C ~ 45°C / 20% ~ 93% RH;
- 储存温度/湿度: -40°C ~ +55°C / 10% ~ 93% RH;
- 外观尺寸: 129mm(L) × 215mm(W) × 35mm(H);
- 重量: 750g/pcs;

### Technical Parameters

- Power Supply: DC12-24v 600mA;
- Panel size: 7 inch;
- Screen color: 65536 grade;
- Resolution of screen: 800 × 480;
- Color of frame: silver white;
- Touch panel mode: resistance type;
- Communication interface: 1 × RS485/rs232/HL-Net 3 Phoenix terminal;
- Download port for project: USB interface T-joint;
- Working Temp/Relative Humidity: 0°C ~ 45°C / 20% ~ 93% RH;
- Storage Temp/Relative Humidity: -40°C ~ +55°C / 10% ~ 93% RH;
- Dimension: 129mm(L) × 215mm(W) × 35mm(H);
- Weight: 750g/PCS;

### 产品尺寸图 (量度单位:毫米)

#### Product size (Unit: mm)

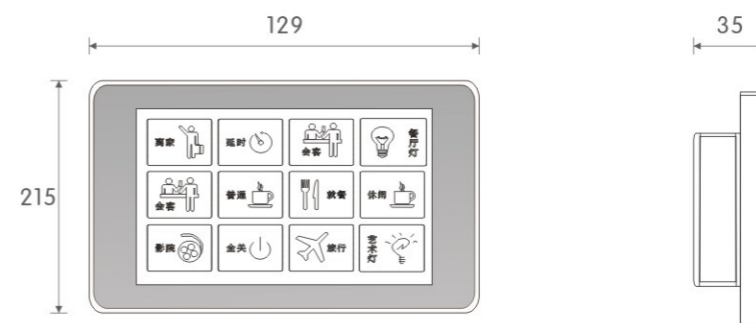

### 接线原理图

#### Wiring principle

