

HL-KP06A 智能6键面板



HL-KP06A

性能特点:

- 标准86盒式安装, 支持多个面板无缝级联;
- 提供6个可编程按键, 图标标示可雕刻或是丝印;
- 可触发短按、短按松开、长按和长按松开按键方式;
- 提供两路远距离感应器输入, 自带12V供电;
- 传感接口为光耦隔离, 高压过流保护, 具有很强的抗干扰性和可靠性;
- 标准工艺, 铝合金冲压、高光, 古铜拉丝面板;
- 各个按键带底色LED和激活色LED, 颜色可定制;
- 采用HL-Net总线通信;

性能描述:

标准86底盒安装, 支持无缝级联, 可搭配多种材质及颜色的面板, 提供6键每个按键带1路LED指示灯, 复位式轻触开关, 结构成熟, 性能稳定铝合金冲压、高光工艺, 古铜拉丝智能面板提供两路IO输入可外接传感器;

Performance Description

The faceplate can be installed in the standard 86 box. It supports seamless connection. The faceplate can collocate a variety of material and colors. It provides 6 keys, each key has 1 way of LED indicator, touch reset switch. It has mature structure, high performance and stable operation. The bronze silk drawing faceplate is handled by high light and aluminum alloy stamping process. It provides two IO in-puts which can be concatenated with the external sensor; aluminum panel drawing;

Performance Characteristics

- The faceplate can be installed in the standard 86 box. Multi faceplate cascade function is available;
- Provides 6 programmable keys. Icon label can be carved or silk printed;
- Can trigger the button modes of touch, touch and release, deep press, deep press and release;
- Provide two ways of long distance sensor input, with 12V power;
- The sensor interface has opto-couplers isolation, high voltage over current protection. It has strong anti-interference capability and high reliability;
- The standard process, aluminum alloy stamping, high light, bronze silk drawing;
- Each key has bottom color LED and activate color LED. Color can be customized;
- Communicated by HL-Net Bus;

技术参数:


- 供电电源:DC24V 20mA;
- 按键输入: 6按键;
- 外观颜色: 黑色外框古铜拉丝面板, 其它颜色定制;
- LED指示: 6按键激活蓝色LED、3个白色LED底色;
- 传感接口: 2个干接点开关量信号;
- 按键类别: 复位轻触式;
- 控制信号: 1×HL-Net总线;
- 运行温度/湿度:0℃~45℃/20%~93%RH;
- 储存温度/湿度:-40℃~+55℃/10%~93%RH;
- 外观尺寸:90mm(L)×90mm(W)×22mm(H);
- 重量:127g/pcs;

Technical Parameters

- Power Supply: DC24V 20mA;
- Button Input: 6 button keys;
- Appearance color: Black frame, Bronze silk drawing faceplate, color customization;
- LED indicator: 6 buttons of activate blue LED, 3 white bottom LED;
- Sensor interface: 2 dry contacts of switch signal;
- Key type: Touch reset;
- Control signal: 1×HL-Net Bus;
- Working Temp/Relative Humidity: 0℃~45℃/20%~93%RH;
- Storage Temp/Relative Humidity: -40℃~+55℃/10%~93%RH;
- Dimension: 90mm(L)×90mm(W)×22mm(H);
- Weight: 127g/PCS;

产品尺寸图 (量度单位:毫米)

Product size (Unit: mm)

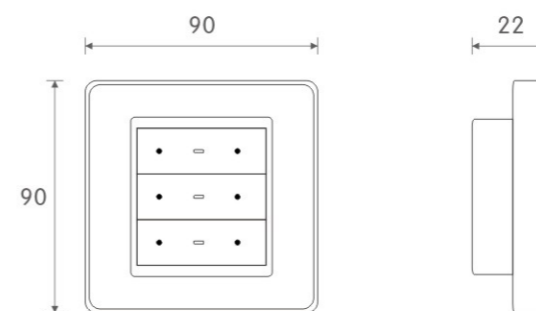

接线原理图 Wiring principle

